PB

特氟龙银电容器 TEFLON SILVER CAPACITOR

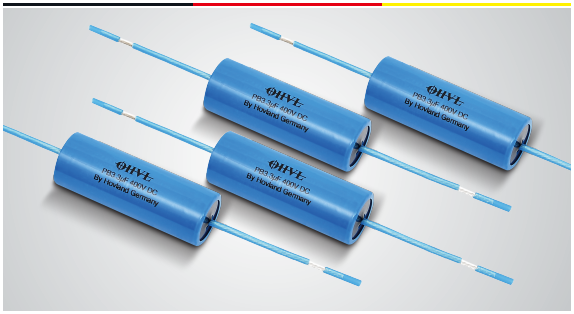

PB has been our undisputed top capacitor model. It combines all our technical highlights, such as Silver metallic sation, Teflon Insulated Wire.

Innovation and evolution winding technology and over 40 years of experience in the manufacturing. finely nuanced and lively shining acoustic colours, which combine into a breathtaking, beautiful, live-like music experience with the utmost precision, presence and three-dimensional plasticity.

HIGHLIGHTS

- Silver connect 银链接
- Featuring terminal leads made from PC-OCC copper (oxygen free)无氧铜
- Teflon Insulated Wire (FEP & Cu & Ag) 16 AWG 0.26mm*19 ød = 1.2 mm特氟龙
- Featuring extremely high quality German made foil, metalized with Aluminum and Zinc particles德国薄膜

TECHNICAL INFORMATION

- Non-polarized capacitor 无极性
- Non inductive construction 结构无感
- Zinc / Aluminum Metallized Polypropylene
- excellent self-healing property 自愈
- Wrapped with polyester adhesive tape and Heat shrinkable sleeve
- Ends filled with flame retardant epoxy resin
- Voltage rating: 400 VDC
- Capacitance tolerance : +/- 3% 5% 10% centered on nominal value
- Temperature range: -30℃ to +85℃
- Extremely low ESR and ESL
- Dissipation factor: ≤ 0.1%
- Insulation Resistance: ≥ 30000 MΩ (25℃)

ΦHVL®
Capacitors, resistors and more.....

RATINGS AND DIMENSIONS:

UNIT: millimeter

VDC	100VDC		250VDC		400VDC		630VDC	
MFD					OD	L		
1.0					12	31		
1.5					13	31		
1.8					14	31		
2.0					15	31		
2.2					16	31		
2.7					17	31		
3.0					19	31		
3.3					20	31		
4.0					22	31		
4.7					18.5	45		
5.6					20	45		
6.8					22	45		
8.2					24.5	45		
10					24	55		
12					25.5	55		
15					28	55		
18					31.5	55		
22					35	55		